CIN : U91990WB1914GAP002567

CLACUTTA CLUB
ADMINISTRATIVE DEPARTMENT
(House Building)
241, Acharya Jagadish Chandra Bose Rd,
Kolkata 700 020
Phone Number: 033-4013-2209 / 10 / 20.

Notice Inviting Tender

Sl. No.	Description	Supply and laying of proposed Sewage Line with Construction of Man Hole Chambers etc. at western part to segregate Rain water and sewage water for STP .
1	Name of work	**Segregation of Rain water and Sewage water for STP, Calcutta club.**
2	Tender No.	**CCL / TD / segregation / STP Dated : 28 / 07 / 2022**
3	Validity of offer	45 days
4	Submission of Tender	
	Starts on	29 / 07 / 2022
	Closes on	18:00 hours on 13 / 08 / 2022
5	Opening of Bids	After 12:00 hours on 16 / 08 / 2022
6	Estimated Cost:	NA
7	Time of Completion:	6 months from date of placement of order. Time is the essence of the contract.
8	The tender papers comprise of the following:	a) This booklet from Page1 to.....7..... . b) Bill of quantities in Annexure 1. c) Drawing in Annexure 2
9	Contact details	Mr. Arpan Kumar Dey , Executive , Civil Engineer . Desk No : 033 – 4013 – 2206. E- mail id: arpankumardeyccl@gmail.com

A. General condition of Tender

1. This is only a Techno-Commercial inquiry and not an order.
2. The intending tenderers are advised to visit the site and examine thoroughly the site condition etc. before submitting the tender. Non familiarity with the job & others will not be considered reason either for extra claims or for not carrying out the work in strict conformity with the specifications.
3. Bids are invited from reputed agencies to carry out the job as described above in the description box Interested Agencies meeting the Eligibility Criteria can submit their Bid Documents off-line i.e. in the Tender Box placed in Calcutta Club.
4. Site address: Calcutta Club Ltd, 241, A. J. C. Bose Road, Kolkata 700 020.
5. Any query on the matter should be sent to us through email only as mentioned in contact details , with the subject line, (Name of work) at least 3 working days before Closing date..
6. Sealed Tender to be submitted in two BID (1) Technical Bid with all related documents (2) Price Bid with GST shown separately. (Price bid to contain only the Bill of quantities of Annexure 1with rates duly filled in.)
7. Two BID documents in two separate sealed envelopes, Technical Bid &Price Bid, to be placed inside a sealed envelope subscribing "**Segregation of Rain water and Sewage water for STP, Calcutta club.**"

B. Special Condition Of Tender :

1) **Site Particulars :** Intending renderers shall be deemed to have visited the site and familiarised themselves with the site condition.
2) **Barricading the site :** Earmarked construction site must be barricaded with pre-coated sheets and safety tapes. All construction materials, tools, tackles, plant equipments are to be kept within the earmarked confined space only so that club's regular activities are not affected.
3) **Extra Item of Work :** During execution should the contractor come across any items of work not covered under schedule of rate, contractor shall draw attention of club authority and obtain prior approval before taking the extra items executed.
4) **Construction Safety :** Construction safety norms are to be strictly followed while working inside club premises such as safety helmet , Glow sign jackets, identity card, body harness etc. To be used by all labourers engaged by the contractor as per nature of the job.

C. Payment Schedule :-

Monthly on account bills would be paid within a fortnight from the date of submission. Final bill will be paid within two months from the date of submission.

In case of delay in completing the work due to reasons solely attributable to the contractor, delay penalty will be imposed at the rate of 0.5% per week or part thereof up to a maximum of 5% of contract value.

D. Pre-Qualification Compliances:

The bidder must submit the copies of the following documents in the Technical bid cover, relating to the status of their firm and should produce the original for verification on demand:

1. PAN Card
2. GST Registration Certificate
3. Recent Trade License
4. Recent Contractor's License for conducting the described job.
5. Valid PF Registration Copy with recent challan copy
6. Valid ESI Registration Copy with recent challan copy
7. The bidder should have successfully executed work of similar nature of **at least one job of 10 Lacks or two jobs of 6 Lacks** during past five (05) years. List of such WO along with customer's satisfactory execution confirmation to be submitted along with the tender.

Amendment to Tender Document:

Any amendment/corrigendum on subsequent date, if any will be displayed on web site of Calcutta Club .

E. Earnest Money:-

EMD of Rs. 25,000.00 to be provided along with the Technical bid through a Demand Draft in the name of " Calcutta Club Ltd ".

Earnest money will be forfeited if the awarded contractor do not commence the work within 15 days from the award date.

F. Security Deposit:-

10% of each Running Account Bill amount will be deducted as Security deposit after adjustment of EMD received i.e. Rs. 25,000.00 and Earnest money will be converted into initial Security Deposit. S.D will be refunded after 6 months from the date of completion, i.e., on completion of defect liability period (6 Months).

G. Submission of Bids

- Bids must be submitted in a sealed envelope super scribing the tender name " **Segregation of Rain water and Sewage water for STP, Calcutta club."** and addressing To The CEO , Calcutta Club, 241 A.J.C Bose Road , Kolkata – 700020 , and submit the same along with Bid document within the specified date & time.
- Calcutta Club, at its own discretion, may extend the deadline for submission of the bid, notification of which will be given on its web site. In such scenario, bidder may submit their bid as per the extended deadline.
- Late Bid: Not acceptable.
- Bids will be submitted in two parts – I. Technical consisting of prequalification compliances along with signed tender document minus Bill of quantities, duly filled and signed, II. Price Bid:- showing separately GST.
- In case work order is awarded to the successful bidder and he is unable to execute/complete within the specified time , earnest money will be forfeited /0.5% will deducted as liquidity damage every week maximum up to 5%.

H. BID Opening and Evaluation:

1. BID Opening :
   Bids will be opened on the due date and stipulated time in presence of Committee Chairperson.
   Confidentiality of Bid Evaluation Process:
   a. Information relating to examination, evaluation and comparison of Bids and recommendation of award of contract shall not be disclosed to the Bidders or any other interested party. Any effort by the Bidder to influence the bidding process may result in rejection of their Bid.

2. Correction of Errors :
   a. Bids which have meet all tender terms and conditions will be checked for any arithmetical errors. Errors will be corrected by Calcutta Club in the following manner :-
      i. Where there is discrepancy between amount in figure and amount in words, the amount stated in word will be considered for the purpose of evaluation and Unit rates of each items will be taken into consideration.

3. Evaluation and Comparison of Bids :
   Bidder must quote for all items and exactly as sought in the PRICE BID. Any deviation will result in rejection of Bid.

I. Award of Contract

1. Work order/ Letter of Acceptance will be issued to the successful bidder. Earnest money will be refunded to the unsuccessful bidders immediately thereafter.

2. Calcutta Club reserves the right to accept any Bid or reject any /all the Bids at any time prior to the award of contract without assigning any reason to the Bidders or incurring any liability to the affected Bidder(s).

J. Corrupt & Fraudulent Practices:

1. Calcutta Club requires the bidders/contractors to maintain highest standard of ethics during the bidding process as well as execution of the contract. Definition of corrupt and Fraudulent practices is as follows:-
   a. "Corrupt practice" means offering or giving anything of value to influence the Club official in procurement process or contract execution.
   b. "Fraudulent practice "means misrepresentation of facts to influence the procurement process or execution of contract to the detriment of Calcutta Club.
2. Bidders are required to furnish complete and correct information required for evaluation of Bid. If the information/ documents forming part of the Bid is found to be false or forged the same shall be sufficient ground for rejection of Bids. In case, the information/ document submitted by the successful Bidder is found to be false/forged after the award of the contract, Calcutta Club has full right to terminate the contract and get the remaining part of the contract executed at the risk and cost of such agency/ contractor without any prejudice to any other right available to Calcutta Club such as withholding payment etc. Earnest money and Security Deposit will be forfeited in such cases.

K. Vendor's undertaking:

We have studied the tender document carefully, inspected the site and have quoted our rates in accordance with the terms and conditions as laid down in the tender document. We also confirm to have accepted all terms and conditions mentioned herein.

---

for CALCUTTA CLUB LTD
CEO & Secretary

CEO & SECRETARY
CALCUTTA CLUB LIMITED

Signatures of the Agency with official seal/stamp

CIN : U91990WB1914GAP002567

Annexure-1

CCL / TD / segregation / STP **Dated : 28 / 07 / 2022**

BOQ , Segregation of Rain water and Sewage water for STP, Calcutta club.						
Sl. No.	DESCRIPTION OF ITEMS	UNIT	QTY.	RATE (Rs.)	AMOUNT (Rs.)	REMARKS
1	Supplying & laying **Double Wall Corrugated (with external annular corrugation and smooth internal walls) High Density Polyethylene Pipes conforming to IS 16098 (Part-II):2013 having Stiffness Class of SN 8** with Ring Stiffness not less than 8.00 KN/Sqm. and Impact Resistance TIR value not more than 10% including necessary jointing materials for nonpressure value not more than 10% including necessary jointing materials for nonpressure underground Drainage, Sewerage & Cross drainage application, earth work in excavation of all sorts of soil, refilling the same after laying the pipes, 100mm thick bed concrete (1:4:8) over a single brick flat soling, removing of the surplus earth, dewatering, ramming, etc. complete in all respect or as per instructed by EIC .					
	a) 150 mm. dia. Pipe (inner dia- 150mm & outer dia- 180mm)	Meter	220		0	
	b) 200 mm. dia. Pipe (inner dia- 200mm & outer dia- 238mm)	Meter	35		0	
2	Dismantling of existing soil & waste pipe from toilet to the existing manhole & reconnected with the new manhole pit. All materials e.g. pipes, fittings, earth work, refilling the same, etc. will be the scope of contractor in all respect or as per instructed by EIC .					
	New connection from existing pit to new pit	Nos.	12		0	
3	Designing and constructing brick masonry **manhole chamber** of the following sizes in brick work of class 75 in cement mortar 1:4 (1cement:4 fine sand), R.C.C. top slab with 1:2:4 mix (1cement : 2 coarse sand : 4 graded stone aggregate 20mm. nominal size) RCC foundation slab 1:2:4 mix (1 cement : 2 coarse sand:4 graded stone aggregate 40 mm nominal size) both inside and outside cement plastering 12 mm thick with cement mortar 1:3 (1cement :3 coarse sand) finished with a floating coat of neat cement on inside face, proper water proofing to ensure no ground water seepage in the manhole, PVC foot rests at 300 mm spacing, benching and making channels in 1:2:4 cement concrete neatly finished, including necessary centering and shuttering, reinforcement, excavation, in all kind of soil, dewatering, refilling, watering, ramming and removing the surplus excavated earth, making good the same complete as required.					
	a) 600mm X 600mm Manhole Chamber	Nos.	22		0	
	b) 750mm X 750mm Manhole Chamber	Nos.	13		0	
	c) 1200mm X 1200mm Manhole Chamber	Nos.	1		0	
4	Supplying, fitting and fixing in position heavy duty **C.I. / M.S. solid type manhole cover** with frame of size 560 mm internal diameter. Load bearing capacity 25MT (Non ISI)	Nos.	36		0	
5	**Construction of R.C.C Bar Screen Chamber** of size 1200 x 1200 x 2150 depth from ground level with the following specifications: 200 thick R.C.C walls on four sides over 200 thick foundation concrete over 75 thick mudmat (1:4:8) and one flat brick soling,outside rough plaster 20 mm thick (1:4) and inside plastering 20 mm thick smooth plaster (1;4) with coving at the bottom and supplying and fixing PVC foot rests @ 300 c/c and 200 thick R.C.C cover slab with a manhole **including fixing the Bar Screen (to be supplied by us) in position**, Charge shall include for all excavation in any kind of soil, dewatering, shoring if necessary, shuttering to walls and top slab, required reinforcements, refilling with selected earth from material excavated earlier, removing the additional excavated earth out of site and cleaning and dressing the entire construction area complete in all respect.					
	A. 1200mm X 1200mm X 2150mm Bar Screen Chamber (Inner Dimension)	Nos.	1			
	Note : Opening and refixing of Paverblock / existing flooring after completion of job to be inclusive of above rates.					
	TOTAL				0	

CIN : U91990WB1914GAP002567

Annexure-2

CCL / TD / segregation / STP **Dated : 28 / 07 / 2022**

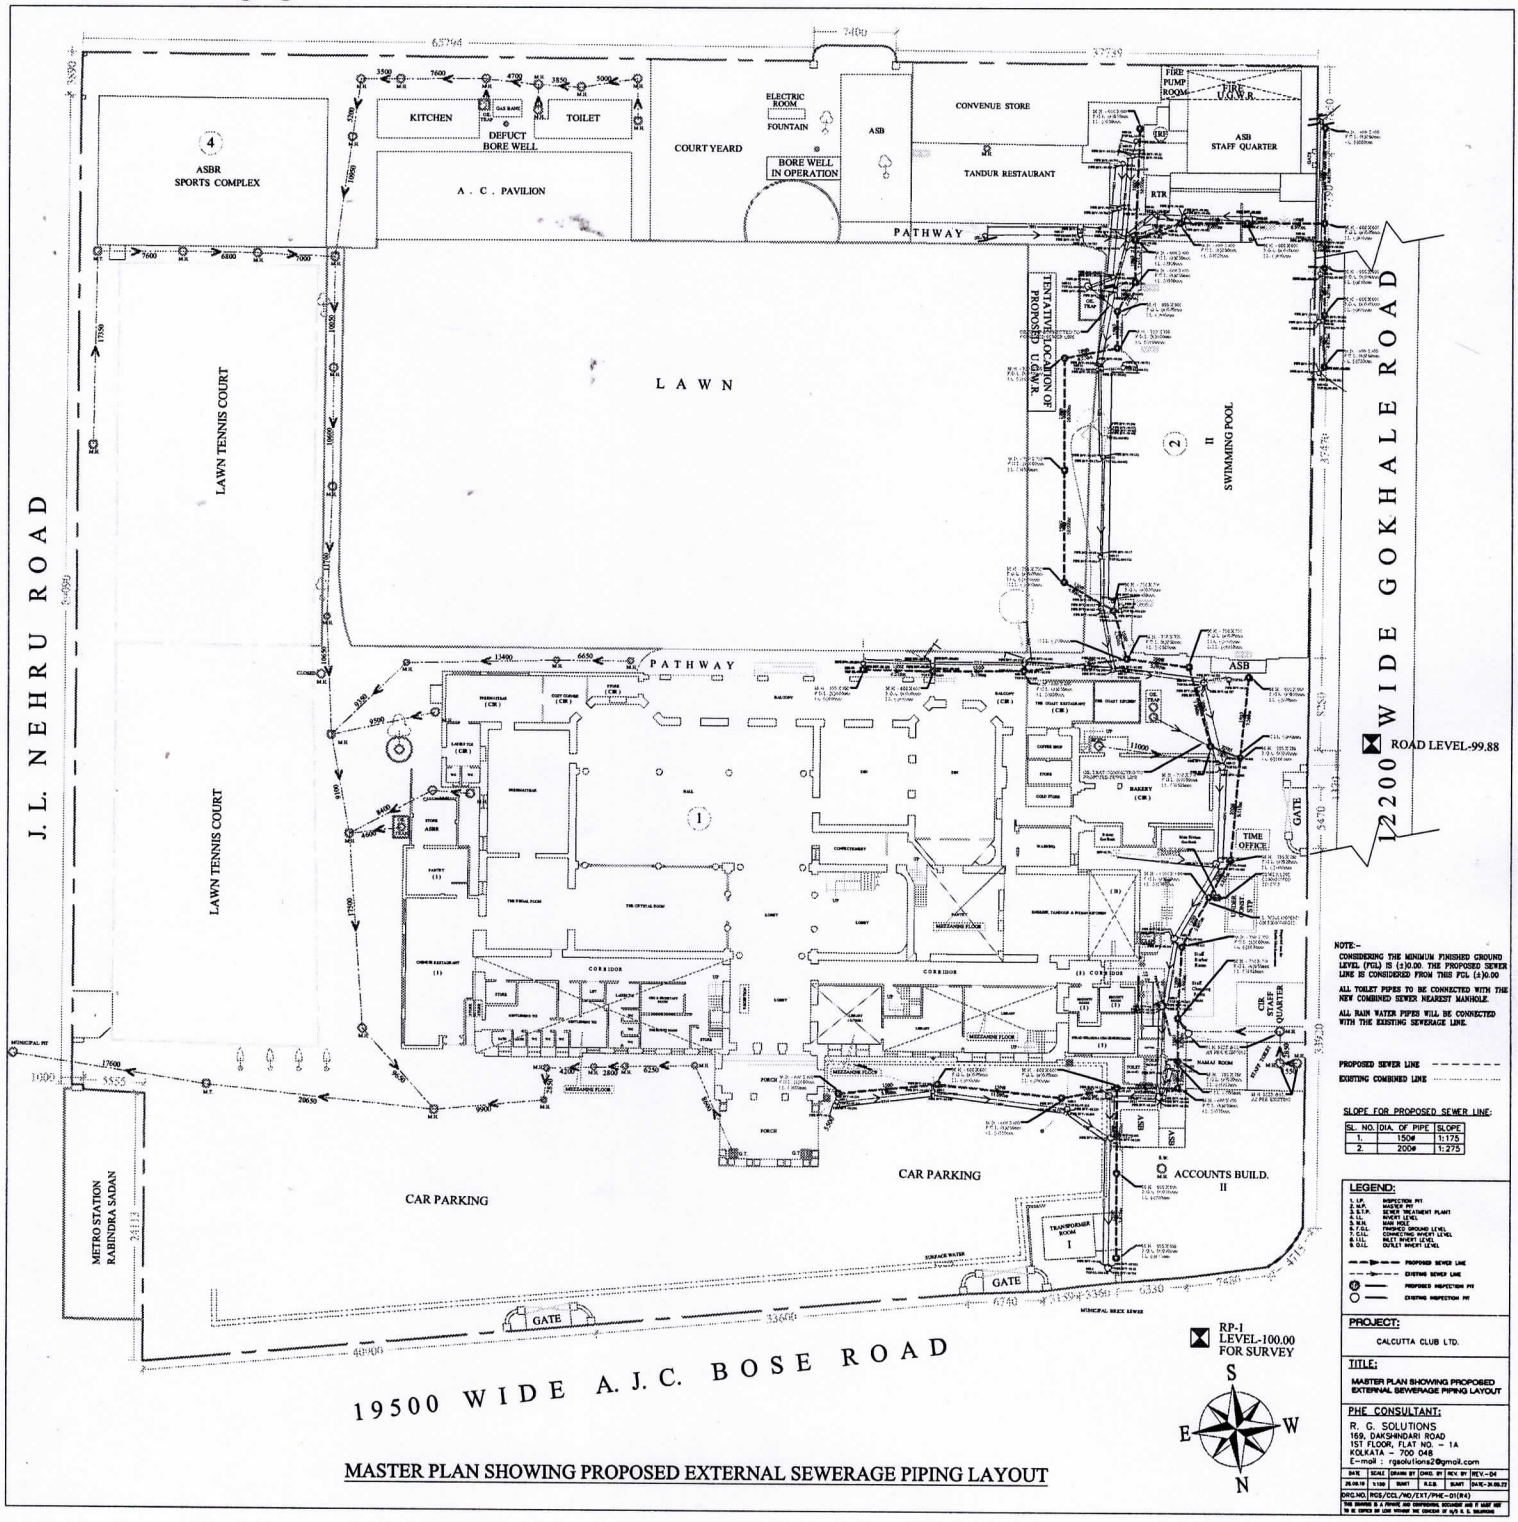

MASTER PLAN SHOWING PROPOSED EXTERNAL SEWERAGE PIPING LAYOUT

CIN : U91990WB1914GAP002567

CCL / TD / segregation / STP **Dated : 28 / 07 / 2022**

TOTAL LANDED COST IN INR: _____
(Total Landed Cost will be Principal Amount + GST to be shown separately above)

In Word: _____

GST % : _____.

Signature of the agency with official seal